

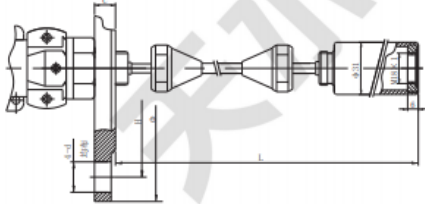


1 Parameters

Range	0m~0.5m~10m
Supply Voltage	+15VDC ~ +30VDC (Calibration value: +24VDC)
Accuracy	1.0 0.25 0.5
Output	4mA ~ 20mA (overlay HART protocol) ; RS485; 0 ~ 10V(Output range can be customized);
Protection level	IP68

2 Features

- ◆ Full welding structure;
- ◆ Non-contact measurement;
- ◆ High stability, long life;
- ◆ High temperature dielectric

Model	Feature	Outline Drawing
CYB3411	1, Conditional measurement, high temperature resistance; 2, Probe full welding; 3, Explosion-proof junction box; 4. Optional 4 is LED / LCD display; 5. Optional installation flange; 6. Range 0 ~ 0.5m ... 10m is optional.	
CYB3416	1, Conditional measurement; 2, Probe full welding; 3, Suitable for industrial ink cartridge liquid levels; 4. Range 0 ~ 0.5m ... 1m is optional.	