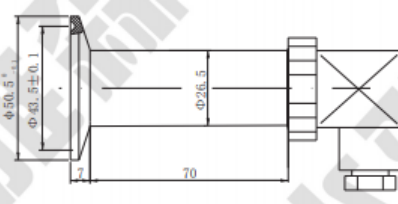
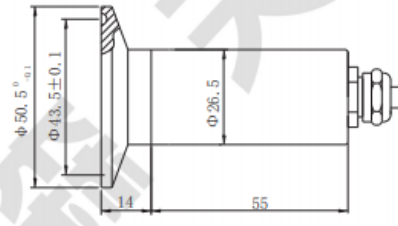


1 Parameters

Range	-0.1MPa...0kPa ~ 10kPa...7MPa
Supply Voltage	+12VDC ~ +30VDC (Calibration value: +24VDC)
Accuracy	0.1 0.25 0.5
Output	4mA ~ 20mA (overlay HART protocol) ; RS485; 0 ~ 10V(Output range can be customized); I ² C; SPI
Protection level	IP66(Customizable IP67 / IP68)

2 Features

- ◆ Clamp pressure interface;
- ◆ Fully welding diaphragm, reliable sealing
- ◆ Working is flexible and diverse
- ◆ Applications in food, medicine and other industries

Model	Feature	Outline Drawing
CYB1505	<ol style="list-style-type: none"> 1. Standard integrated Horsmann joint; 2. Pressure interface material can be customized; 3. Protective level IP65. 	
CYB1510	<ol style="list-style-type: none"> 1. Standard waterproof joint; 2. Working temperature range: -40 ° C ~ 85 ° C; 3. Pressure interface material can be customized; 4. Protective level IP65. 	



TIANSHUI HUATIAN SENSOR

CYB1500 Series Clamp Pressure Transmitter

<p>CYB1504</p>	<ol style="list-style-type: none"> 1. Connector with ED seal ring, avionics; 2. Working temperature range: $-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$; 3. Pressure interface material can be customized; 4. Protective level IP65. 	
<p>CYB1517</p>	<ol style="list-style-type: none"> 1. 50 chuck interface; 2. Working temperature range: $-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$; 3. Pressure interface material can be customized; 4. Protective level IP65. 	